


THREE RISE

THREE RISE



Facebook

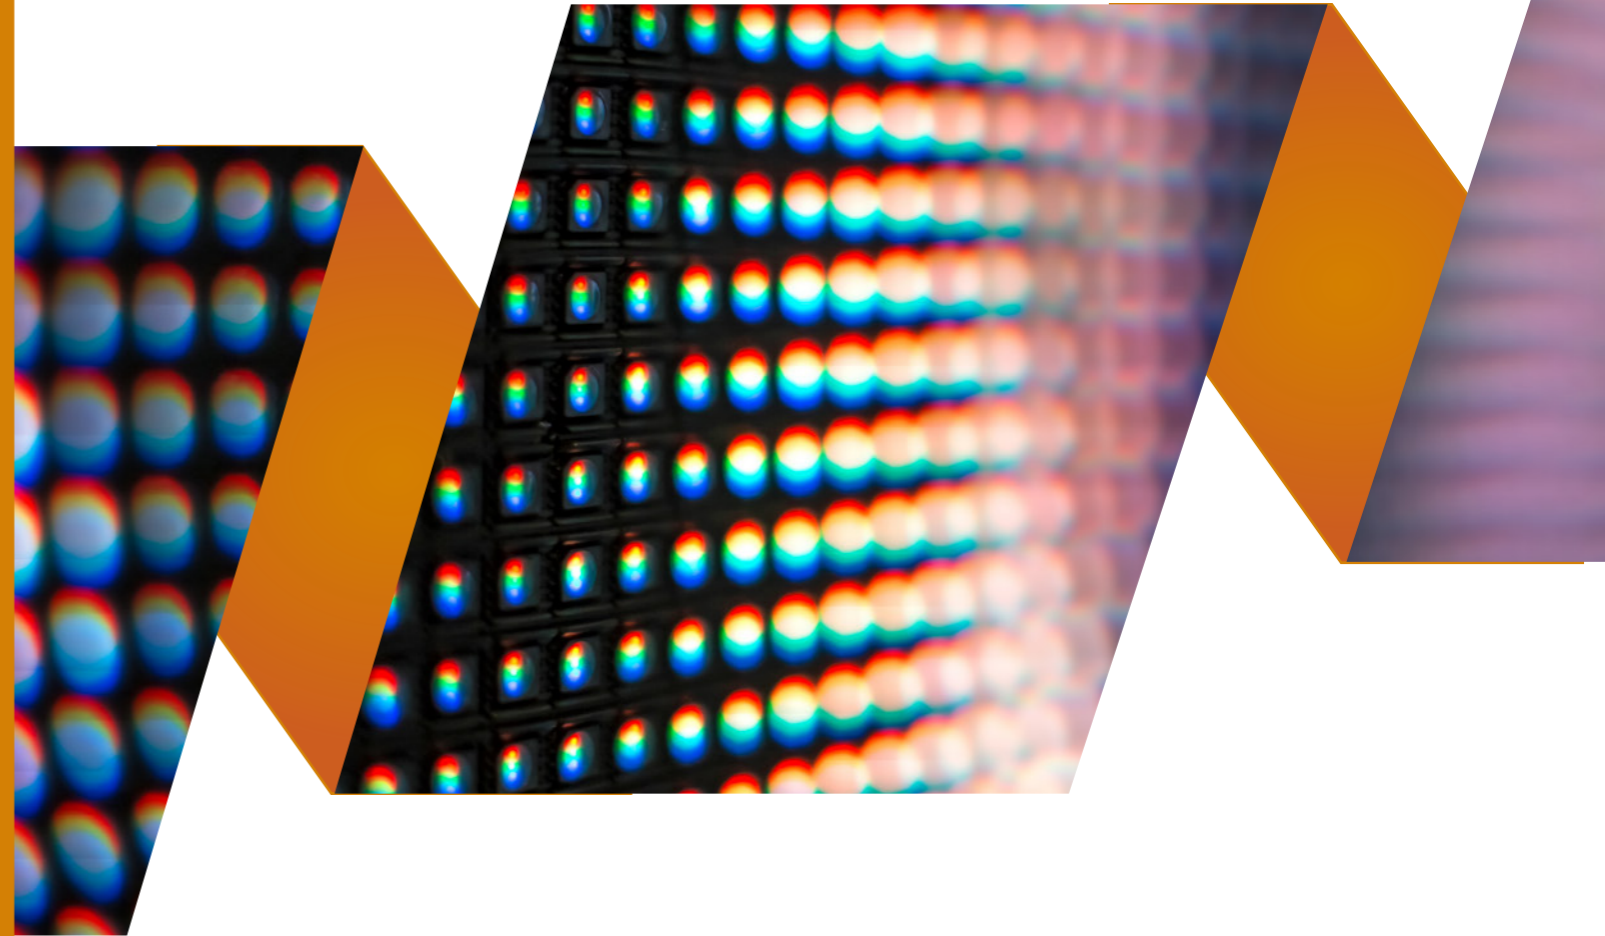

LinkedIn



YouTube

Shenzhen Threerise Wisdom Technology Co.,LTD

🌐 <https://www.threeriseled.com>

📍 China Office: 4 Bld,Fuzhong Industrial Zone,Bao'an District,Shenzhen,China

Dubai Office: 380170,street 25,Al Khabaisi,Deira,Dubai-UAE

📞 WhatsApp: +86 133 1680 5619

BROCHURES

LED DISPLAY

Global Full Industry Chain LED Display Manufacturer

Contents

01



COMPANY PROFILE

ABOUT THREEWISE
CERTIFICATE
BUSINESS PHILOSOPHY

02



SMART FACTORY

INDUSTRY CHAIN
INTELLIGENT PLANT

03



PRODUCT DISPLAY

INDOOR
OUTDOOR
CREATIVE DISPLAY
RENTAL

04



CUSTOMER SERVICE

ENGINEERING CASE
SERVICE CONTENT



CERTIFICATE



CE



FCC



CCC

ABOUT THREERISE

We boast a complete LED industry chain, encompassing LED lamps, PCB, IC, and modules. Our production base spans a total area of 10,000 square meters, with a building area exceeding 40,000 square meters and a workforce of over 100 employees.

At Threerise, we integrate a seasoned R&D team capable of rapidly transforming customer needs into innovative product solutions. Our experienced technical team empowers global projects, while our professional service team provides customers with comprehensive one-stop solutions, including consulting, planning, design, financing, construction, and maintenance.

Our domestic partners are spread across East China, North China, South China, Northeast China, and other regions, with over 150 partners and 1,000+ engineering collaborators. Internationally, our overseas partners span Europe, the United States, the United Kingdom, Oceania, the Middle East, and Asia, solidifying our global presence.

40000 m²
Area

100
Staffs

4 Million PCS
Module Annual Output



CB



BIS




ISO



Letters Patent

BUSINESS PHILOSOPHY




01
PRODUCT

- R&D First
- Material Control
- Equipment Accuracy
- Workmanship Guaranteed
- Product Inspection
- Senior Team



02
PLAN

- Demand Analysis
- Technology Assessment
- Design Planning
- Product Choice
- Cost Estimate



03
SERVICE

- Technical Support
- Installation And Debugging
- After-sales Service
- Professional Training




04
FLOW

- Search Optimization
- Social Media Marketing
- Content Marketing
- Advertising

INDUSTRY CHAIN

VERTICALLY INTEGRATED INDUSTRY CHAIN

THREERISE commands the entire LED display value chain through a formidable, vertically integrated ecosystem. We master six core manufacturing segments: LED Lamps, LED PCBs, ICs, LED Modules, Cabinets, and Metal Fabrication. This strategic control, from upstream components to midstream assembly, ensures product excellence and supply chain resilience. Leveraging this foundation with fully automated production, we deliver a comprehensive portfolio of high-performance LED Display Solutions worldwide.

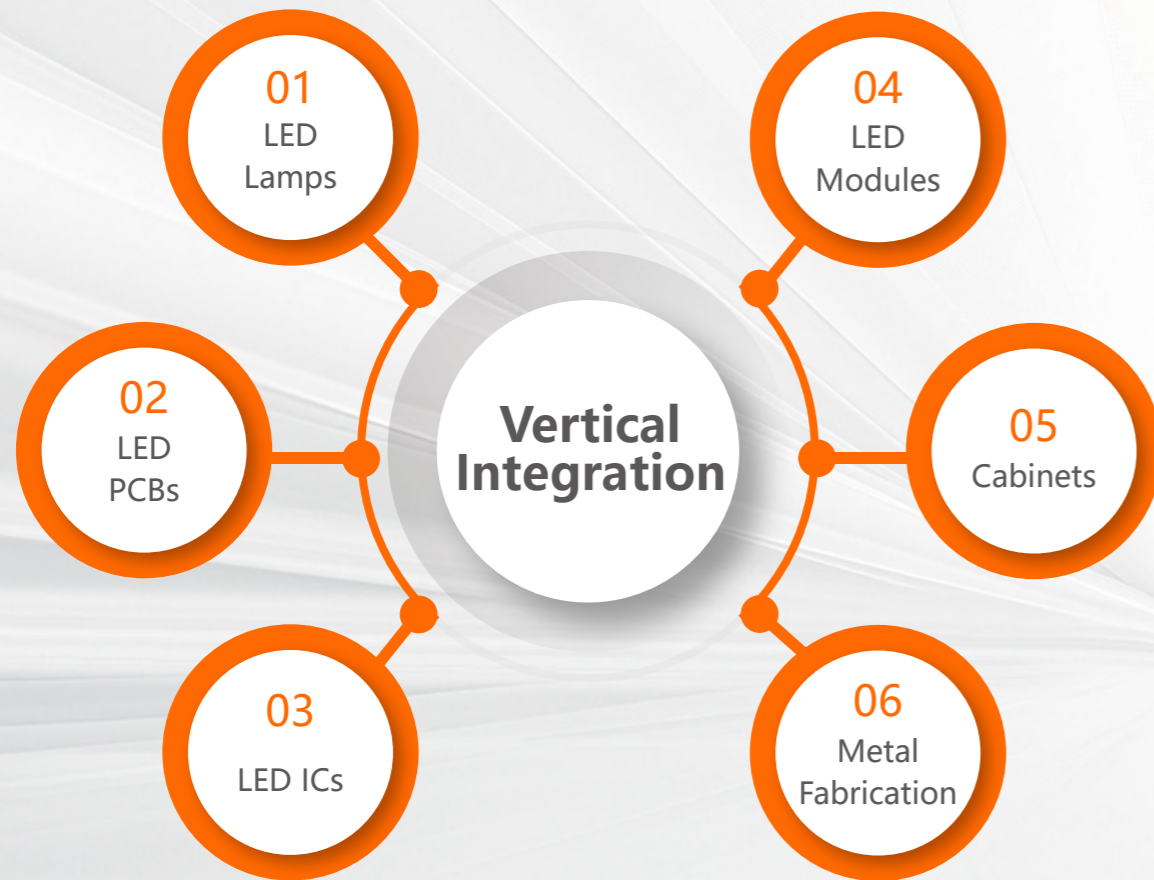

END-TO-END OPERATIONAL EXCELLENCE

Our operational excellence is rooted in this full-chain control. We engage deeply in every phase—from smart manufacturing and R&D to marketing and service—creating a seamless and responsive structure. By optimizing each step from raw material to end-user delivery, we enhance efficiency, reduce costs, guarantee supply chain stability, and maximize ROI for our partners.

INTELLIGENT PLANT



01

INDOOR



INDOOR LM SERIES

Double-side Screen

Cabinet Size : 500*500*26mm

Module Size : 250*250mm

Pixel Pitch : P1.56 / P1.953 / P2.604 / P3.9



Thickness 26mm



Integrated Cable



High Grayscale



Customized Solutions



Front Maintenance



Energy Efficiency



IP65(GOB)



High Refresh

Key Features

- Excellent Image Quality
- Intelligent Scene
- Double-Sided Display
- Ultra-Light & Slim
- Single-Module Design
- Easy To Maintain & Install

Specifications

Product Name	LM-P1.56	LM-P1.953	LM-P2.604	LM-P3.91
Pixel Pitch	1.56mm	1.953mm	2.604mm	3.91mm
LED Lamp	SMD1212	SMD1515	SMD1515	SMD2020
Module Size	250*250mm			
Module Weight	0.23KG	0.23KG	0.23KG	0.19KG
Cabinet Size	500*500*26mm			
Cabinet Resolution	320*320	256*256	192*192	128*128
IP Rate	IP30			
Brightness	The standard brightness is 800cd/m ² , and the high-end brightness is 2000-3000cdm ²			
Horizontal Viewing Angle	≥160°			
Vertical Viewing Angle	≥140°			
Best Viewing Distance	2.5m	3m	4m	6.5m
Working Voltage	4.5-5V			
Scan	1/40S	1/32S	1/24S	1/16S
Gray Scale	12-16Bit			
Refresh Frequency	3840Hz			

Application



Lecture Hall



Exhibition



Shopping Mall

INDOOR DISPLAY DLK SERIES

Cabinet Size : 320*360mm

Module Size : 320*180mm

Pixel Pitch : P1.2 / P1.3 / P1.5 / P1.6 / P1.8 / P2.5



Front & Rear Install



Precise Alignment



High Refresh



16:9 Golden Ratio



Multiple Patents



No Debugging



Thin & Light



Free Splicing


Key Features

- Ultra-Thin & Lightweight
- No Steel Construction
- No Calibration Needed
- Seamless Merging
- Auto Calibration
- Convection Cooling

Specifications

Product Name	DLK-P1.2	DLK-P1.3	DLK-P1.5	DLK-P1.6	DLK-P1.8	DLK-P2	DLK-P2.5
Pixel Pitch	1.25mm	1.33mm	1.55mm	1.66mm	1.88mm	2mm	2.5mm
LED Lamp	SMD1010	SMD1010	SMD1212	SMD1212	SMD1515	SMD1515	SMD2121
Module Size	320*180mm						
Module Resolution	256*144	240*135	206*116	192*108	170*96	160*90	128*72
Cabinet Size	320*360*40mm						
Cabinet Resolution	256*288	240*270	206*232	192*216	170*192	160*180	128*144
Cabinet Weight	1.75KG						
Maintenance Methods	Front Maintenance						
IP Rate	IP30						
Brightness	≥600cd/m ²						
Horizontal/Vertical	160°/140°						
Visible Distance	≥2m	≥2.1m	≥2.6m	≥2.7m	≥3m	≥3m	≥4m
Refresh Rate	≥3840-7680Hz						
Scan	1/64S	1/45S	1/58S	1/54S	1/48S	1/45S	1/36S
Gray Scale	12~14 Bit						
Structural Features	Hard Connection						


Application

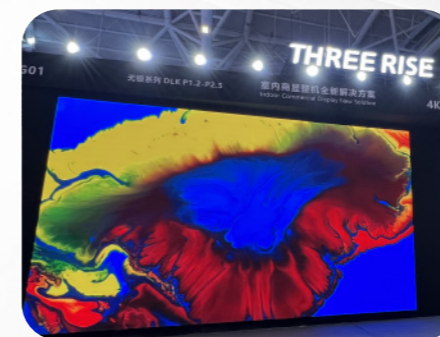

Exhibition



Auditorium

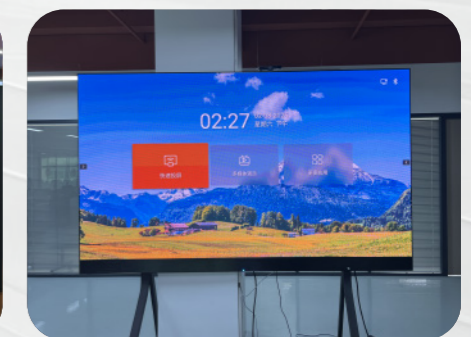

Meeting Room

ALL IN ONE DISPLAY **DTEM** SERIES

Cabinet Size : 115inch / 144inch / 173inch

Module Size : 320*180mm

Pixel Pitch : P1.33 / P1.66 / P2



Backframe Installation



Lock Panel Profile



Handwriting Function



Remote Meetings



Wireless Transmission



Support Android & Microsoft



Support Naked Eye 3D



2K/4K


Key Features

- Super Clear Image Quality
- Ultra-Slim & Light
- Remote Conferencing
- Infrared Touch
- High-Quality Audio
- Wireless Screen Projection

Specifications

Product Name	DTEM-P1.3-115	DTEM-P1.6-144	DTEM-2-173
Pixel Pitch	1.33mm	1.66mm	2mm
LED Lamp	SMD1010	SMD1212	SMD1515
Module Size	320*180mm		
Cabinet Size	320*360*40mm		
Cabinet Resolution	240*270	192*216	160*180
Cabinet Weight	85kg	110kg	250kg
Maintenance Methods	Front Maintenance		
IP Rate	IP30		
Brightness	600cd/m ²		
Max Power Consumption	2100W/m ²	3500W/m ²	3500W/m ²
Horizontal/Vertical	160°/140°		
Visible Distance	≥2.2m	≥2.7m	≥3.3m
Refresh Rate	≥3840-7680Hz		
Grey Scale	12-14 Bit		
Structural Features	Hard Connection		

Application

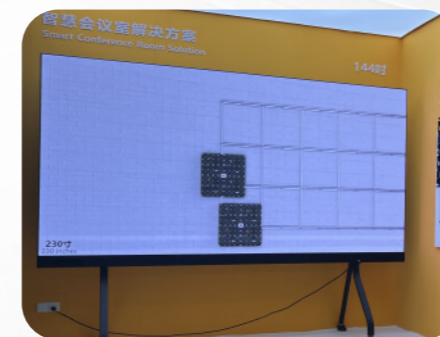

Exhibition



Meeting Room



Classroom


INDOOR TH SERIES

Ultra-Thin Fixed Screen

Cabinet Size : 250*500mm / 250*750mm / 250*1000mm

Module Size : 250*250mm

Pixel Pitch : P1.25 / P1.56 / P1.95 / P2.6 / P2.97 / P3.91

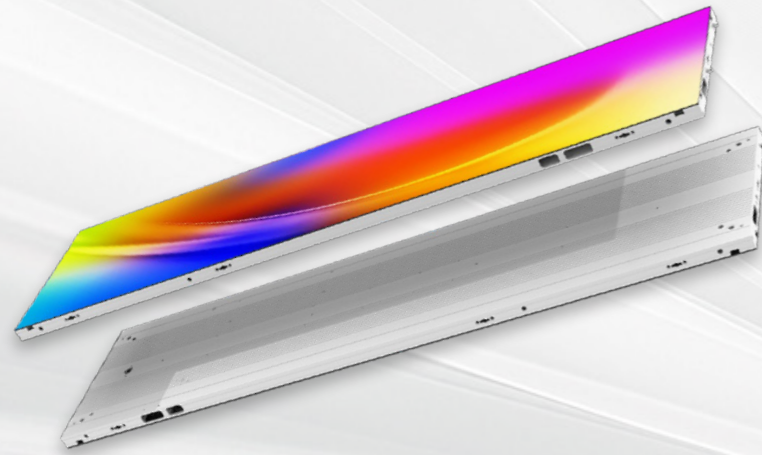

Thickness 20mm



90° Splice



High Grayscale



High Refresh



High Brightness



Light Weight



Customized Solutions



Common Cathode


Key Features

- Front-End Maintenance
- Ultra-Light & Slim
- Freestyle Merging
- Multiple Models & Sizes
- Dual Backup For Enhanced Stability
- Easy Maintenance & Installation

Specifications

Product Name	TH-P1.25	TH-P1.5	TH-P1.9	TH-P2.6	TH-P2.9	TH-P3.9
Pixel Pitch	1.25mm	1.56mm	1.953mm	2.604mm	2.97mm	3.91mm
LED Lamp	SMD1010	SMD1212	SMD1515	SMD1515	SMD2020	SMD2020
Module Size(W*X)	250*250mm					
Cabinet Size(W*H*D)	1000*250*20mm/750*250*20mm/500*250*20mm					
Cabinet Resolution	800*200	640*160	512*128	384*96	384*84	256*64
	600*200	480*160	384*128	288*96	252*84	192*64
	400*200	320*160	256*128	192*96	168*84	128*64
Cabinet Weight	4.8/3.6/2.4KG					
Maintenance Methods	Front Maintenance					
IP Rate	IP30					
Brightness	≥600cd/m ²					
Max Power Consumption	550W/m ²					
Horizontal/Vertical	140°/120°					
Visible Distance	≥2m	≥2.5m	≥3m	≥4m	≥5m	≥6m
Refresh Rate	≥3840-7680Hz					
Scan	1/50S	1/40S	1/32S	1/32S	1/28S	1/16S
Grey Scale	12-14 Bit					
Connection Method	Hard Connection					

Application

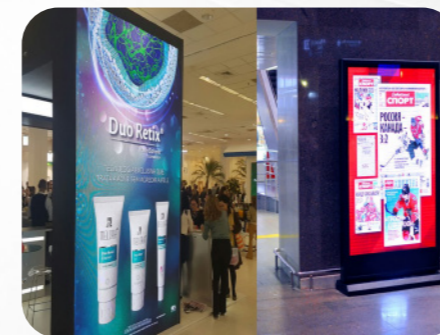

Shopping Mall



Meeting Room



Lecture Hall

INDOOR COB SERIES

Cabinet Size : 600*337.5mm

Module Size : 150*168.75mm

Pixel Pitch : P0.6 / P0.7 / P0.9 / P1.1 / P1.25 / P1.56



Thickness 37.4mm



Dual Power Backup



High Grayscale



Wide Views



All-Around Protection



Energy Efficiency



Supports HDR



Common Cathode

Key Features

- High Brightness And High Grayscale
- Excellent Image Quality
- Advantage Of Micro-level Chips
- Excellent Heat Dissipation
- Power Saving
- High Resistance

Specifications

Product Name	COB-II-P0.6	COB-II-P0.7	COB-II-P0.9	COB-II-P1.25	COB-II-P1.56
Pixel Pitch	0.625mm	0.78125mm	0.9375mm	1.25mm	1.5625mm
LED Lamp	COB Common Cathode	COB Common Cathode	COB Common Cathode	COB Common Anode	COB Common Anode
Module Size	150*168.75mm				
Module Resolution	240*180	192*216	160*180	120*135	192*108
Cabinet Size	600*337.5*38mm				
Cabinet Resolution	960*540	768*432	640*360	480*270	384*216
Cabinet Weight	4.3KG				
Maintenance Mode	Front Maintenance				
IP Rate	IP65(Front)				
Brightness	≥600cd/m ²				
Horizontal/Vertical	H165°/V165°	H160°/V160°	H160°/V160°	H160°/V160°	H160°/V160°
Visible Distance	≥0.93m	≥1.1m	≥1.4m	≥2m	≥2.6m
Refresh Frequency	≥3840-7680Hz				
Scan	1/60S	1/72S	1/54S	1/60S	1/54S
Gray Scale	16 Bit				
Connection Method	Hard Connection				


Application



Lecture Hall



Meeting Room


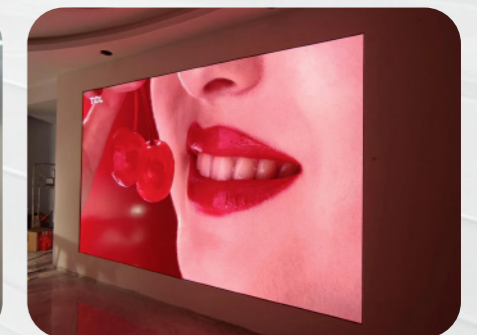


Hotel

INDOOR MODULE DQ SERIES

Module Size : 320*160mm

Pixel Pitch : P1.2 / P1.5 / P1.8 / P2 / P2.5 / P3 / P4 / P5



Drive IC



High Refresh



Ultra Broad Perspective



Standard Size



Worry Free After Sale



Support OEM/ODM

Key Features

- Crystal Clear Imagery
- Premium LED Quality
- Easy To Carry And Install
- Worry Free After-Sales Support
- Energy-Efficient And Eco-Friendly
- Can Be Customized

Specifications

Product Name	DQ-P1.25	DQ-P1.53	DQ-P1.86	DQ-P2	DQ-P2.5	DQ-P3	DQ-P4	DQ-P5
Module Size	320*160*14mm							
Pixel Pitch	1.25mm	1.538mm	1.86mm	2mm	2.5mm	3.076mm	4mm	5mm
LED Lamp	SMD1010	SMD1212	SMD1515	SMD1515	SMD2121	SMD2121	SMD2121	SMD2121
Module Resolution	256*128	208*104	172*86	160*80	128*64	104*52	80*40	64*32
FPC Signal Interface	HUB320				HUB75			
Visible Distance	≥2m	≥2.5m	≥3m	≥3m	≥4m	≥5m	≥6.8m	≥8.5m
Brightness	≥600cd/m ²							
Contrast	≥5000:1							
Gray Scale	12-14 Bit							
Horizontal/Vertical	160°/140°							
Scan	1/64S	1/52S	1/43S	1/40S	1/32S	1/26S	1/20S	1/16S
Environment	Indoor							
Refresh Rate	≥3840Hz							
IP Rate	IP30							
Structural Features	Soft Connection							

Application



Meeting Room



Technology Museum





Sales Office

INDOOR COB MODULE SERIES

Module Size : 320*160mm

Pixel Pitch : P1.5 / P1.8



Drive IC



High Refresh



Ultra Broad Perspective



Standard Size



Worry Free After Sale



Support OEM/ODM

Key Features

- Crystal Clear Imagery
- Premium LED Quality
- Easy To Carry And Install
- Worry Free After-Sales Support
- Energy-Efficient and Eco-Friendly
- Can Be Customized

Specifications

Product Name	COB-P1.5	COB-P1.8
Module Size	320*160*14.5mm	320*160*15mm
Pixel Pitch	1.538mm	1.86mm
Lamp Type	COB	
Module Resolution	208*104	172*86
FPC Signal Interface	HUB320	
Visible Distance	≥1.8m	≥2m
Brightness	≥600cd/m ²	
Contrast	≥10000:1	
Gray Scale	13Bit	
Horizontal/Vertical	150°/130°	150°/150°
Scan	1/52S	1/43S
Environment	Indoor	
Refresh Rate	3840Hz	
IP Rate	P30	
Structural Features	Soft Connection	


Application



Shopping Mall



Command Room

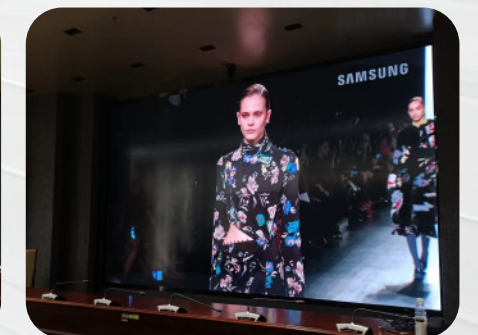

Meeting Room

Quinquette
numérique et
gourmande

Entrée

EP7



02

OUTDOOR

bar • cantine • afterwork • café • exposition • restaurant • bar • ca

ENTRÉE
→

Menu board with text and prices.

OUTDOOR DSS SERIES

Suitable for Stadium Screens


Cabinet Size : 960*960mm

Module Size : 480*320mm

Pixel Pitch : P3.33 / P4.44 / P5.7 / P6.67 / P8 / P10



Aluminum Back Cover



High-Brightness LED



High Grayscale



High Refresh



Customized Solutions



Energy Efficiency



IP66



Wall Mount

Key Features

- Over 30% Energy Savings
- Anti-Collision Mask: Dustproof & Waterproof
- Integrated Swivel Bracket For Easy Setup
- Wall-Mountable, No Steel Structure Needed
- Mobile Double Bracket Support
- 90° Angle Right-Angle Links And 90° Bend Links

Specifications

Product Name	DSS-I-P3.33	DSS-I-P4.44	DSS-I-P5.7	DSS-I-P6.67	DSS-I-P8	DSS-I-P10
Pixel Pitch	3.33mm	4.44mm	5.7mm	6.67mm	8mm	10mm
LED Lamp	SMD1415	SMD1921	SMD2727	SMD2727	SMD2727	SMD2727
Module Size	480*320*16mm					
Cabinet Size	960*960*87mm					
Cabinet Resolution	288*288	216*216	168*168	144*144	120*120	96*96
Cabinet Weight	25KG					
Cabinet Material	Profiled Aluminium					
Maintenance Methods	Front/Rear Maintenance					
IP Rate	Front IP66					
Configuration	Common Anode					
Power Consumption Max.	700W/m ²					
Power Consumption Ave.	235W/m ²					
Brightness	≥4500cd/m ²	≥5500cd/m ²	≥6000cd/m ²	≥6000cd/m ²	≥6000cd/m ²	≥6000cd/m ²
Configuration	Common Cathode					
Power Consumption Max.	550W/m ²					
Power Consumption Ave.	186W/m ²					
Brightness	≥4500cd/m ²	≥5500cd/m ²	≥6000cd/m ²	≥6000cd/m ²	≥6000cd/m ²	≥6000cd/m ²
Configuration	Ultra-Energy Saving					
Power Consumption Max.	257W/m ²					
Power Consumption Ave.	92W/m ²					
Brightness	/	≥5500cd/m ²	≥7000cd/m ²	≥7000cd/m ²	≥7000cd/m ²	≥7000cd/m ²
Configuration	Super Brightness					
Power Consumption Max.	550W/m ²					
Power Consumption Ave.	186W/m ²					
Brightness	/	≥10000cd/m ²	≥10000cd/m ²	≥10000cd/m ²	≥10000cd/m ²	≥10000cd/m ²
Horizontal/Vertical	140°/120°					
Visible Distance	≥5m	≥7.5m	≥9m	≥11m	≥13m	≥17m
Refresh Rate	3840Hz					
Scan	1/12S	1/9S	1/7S	1/6S	1/3S	1/2S
Grey Scale	16Bit					
Connection method	Hard Connection					

Application



Shopping Mall



Basketball Match




Football Match

OUTDOOR DSG SERIES

Cabinet Size : 1000*1000mm

Module Size : 500*250mm

Pixel Pitch : P2.97 / P3.91 / P4.81 / P6.25 / P7.81 / P10.42



High-Brightness



High Refresh



Multiple designs



Eco-Friendly



Moisture & Water Protection



PCB Conformal Coating

Key Features

- Common Cathode Energy Saving
- Full Front & Rear Maintenance
- Naked-eye 3D Display
- Excellent Corona Resistance
- Black glue protection
- 100% Aluminum Construction

Specifications

Product Name	DSG-P2.97	DSG-P3.91	DSG-P4.81	DSG-P6.25	DSG-P7.81	DSG-P10.42
Pixel Composition(SMD)	1415	1921	1921	2727	2727	2727
Pixel Pitch	2.97mm	3.91mm	4.81mm	6.25mm	7.81mm	10.42mm
Module Resolution	168*84	128*64	104*52	80*40	64*32	48*24
Module Size	500*250*16mm					
Module Weight	1.93KG					
Cabinet Resolution	336*336	256*256	208*208	160*160	128*128	96*96
Cabinet Size	1000*1000*84.5mm					
Cabinet Weight	25KG					
Cabinet Material	Profile Cabinet					
Cabinet Density	112,896	65,536	43,264	25,600	16,384	9,216
IP Rating	IP66					
Color Temperature	6500-9000K					
Visual Angle	140° / 120°					
Chromaticity uniformity	Within ±0.003Cx, Cy					
Contrast Ratio	8000:1					
Configuration	Common Cathode					
The Max Power Consumption/Average Power Consumption	550W/m ² /186W/m ²					
Brightness	≥5000					≥5500
Configuration	Common Anode					
The Max Power Consumption(W/m ²)/Average Power Consumption(W/m ²)	70100W/m ² /235W/m ²					
Input Voltage	AC100~240V					
Frequency	50Hz&60Hz					
IC Driving	1/21s	1/8s	1/7s	1/5s	1/4s	1/2s
Refreshing Rate	3840Hz/7680Hz					
Gray Scale	16 Bit					
Maintenance Method	Front and Rear					
Lifespan	100,000H					
Work Temperature/Humidity	-40°C-80°C/10%RH-98%RH (Non Condensing)					
Storage Temperature/Humidity	-20°C-60°C/10%RH-98%RH (Non Condensing)					

Application



In-park Advertising



Billboard





Stadium

OUTDOOR MODULE DS SERIES

Module Size : 320*160mm

Pixel Pitch : P2.5 / P3 / P4 / P5 / P6 / P8 / P10



Drive IC



High Refresh



Ultra Broad Perspective



Standard Size



Worry Free After Sale



Support OEM/ODM


Key Features

- Ultimate Clarity
- Excellent Outdoor Protection
- Top-Grade Components
- High Contrast Impact
- Can Be Customized
- Secure & Dependable

Specifications

ProductSpecification	DS-P2.5	DS-P3	DS-P4	DS-P5	DS-P6	DS-P8	DS-P10
Module Size	320*160*18mm			320*160*19mm			
Pixel Pitch	2.5mm	3.076mm	4mm	5mm	6.667mm	8mm	10mm
LED Lamp	SMD1415	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD3535
Module Resolution	128*64	104*52	80*40	64*32	48*24	40*20	32*16
FPC Signal Interface	HUB75						
Viewing Distance	≥4m	≥5m	≥6.5m	≥8.5m	≥11m	≥13.5m	≥17m
Brightness	4000-4500cd/m ²						5000-5500cd/m ²
Contrast	≥5000:1						
Gray Scale	12-14 Bit						
Horizontal/Vertical	140°/130°						
Scan	1/16S	1/13S	1/10S	1/8S	1/6S	1/5S	1/2S
Environment	Outdoor						
Refresh Rate	1920/3840Hz						
IP Rate	IP65(Front)						
Structural Features	Soft Connection						

Application

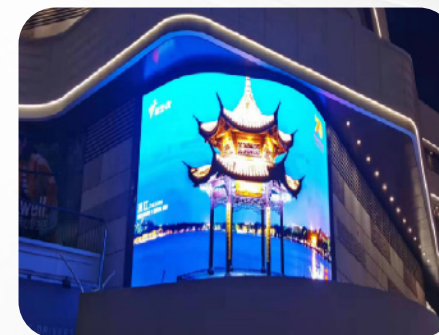

Exhibition



Advertisement



Shopping Mall

03

CREATIVE DISPLAY

Sphereon SP SERIES

Pixel Pitch : P1.8 / P2 / P2.5 / P3 / P4 / P5 / P6 / P10



Seamless Assembly



Good Heat Dissipation



Customizable Size



360° Viewing Angle



Excellent Demonstration Effect



Simple Installation

Key Features

- Distinctive shape
- Aesthetically pleasing design
- Multiple Installation Methods
- All-round display
- High-Definition Picture Quality

Specifications

Scene	Indoor					Outdoor		
Product Model	P1.8	P2.0	P2.5	P3	P4	P5	P6	P10
Pixel Pitch	1.86mm	2mm	2.5mm	3mm	4mm	5mm	6mm	10mm
Spherical Size	Customized (1m,2m,3m,4m...)							
LED Lamp	SMD1212	SMD1515	SMD2121	SMD2121	SMD2121	SMD1921	SMD1921	SMD3535
Brightness	≥600cd/m ²					≥5,000cd/m ²		
Average Power	310w/m ²					430w/m ²		
Maximum Power	600w/m ²					800w/m ²		
Refresh Rate	1,920HZ-3,840HZ							
Input Voltage	AC100-240V/50-60Hz							
Life Span	≥100000Hour							
Operating Temperature	-20°C ~ 60°C							
Operating Humidity	10% ~ 90%RH							
Gray Scale	12-16 Bit							

Application



Science Museum




Park



Shopping Mall

OrbiCore OC SERIES

Pixel Pitch : P1.8 / P2 / P3 / P4 / P5 / P6 / P8

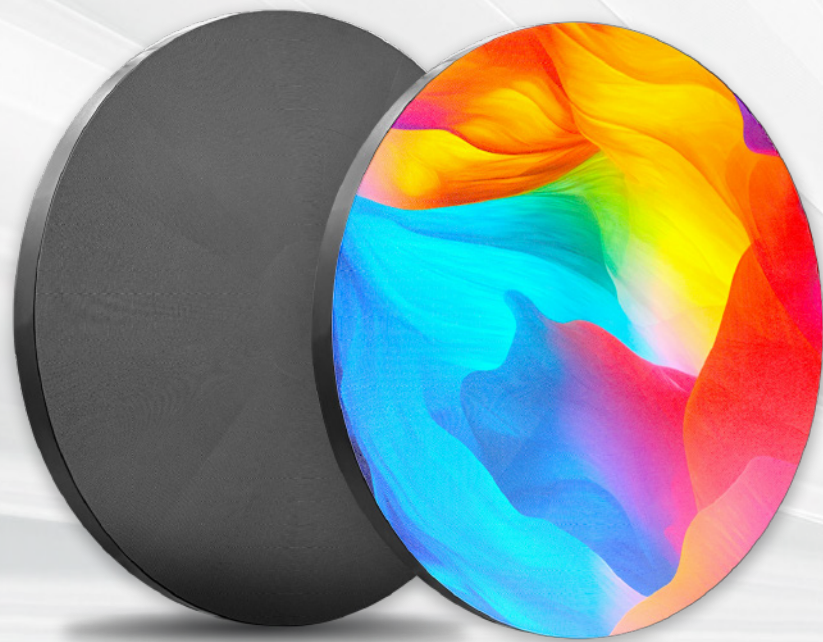

Customizable



High Refresh Rate



Creative



Uniform Brightness



Customizable Design



High Contrast

Key Features

- Customize Entire Circles
- Convenient For Maintenance
- Supports Uniform Tapping Technology
- Supports Front And Rear Maintenance
- Displayed Image Is Not Distorted

Specifications

Scene	Indoor				Outdoor			
Product Model	P1.8	P2.0	P2.5	P4	P4	P5	P6	P8
Pixel Pitch	1.86mm	2mm	2.5mm	4mm	4mm	5mm	6mm	8mm
LED Lamp	SMD1212	SMD1515	SMD2121	SMD2121	SMD1921	SMD1921	SMD1921	SMD2727
Brightness	≥600cd/m ²				>5,000cd/m ²			
Average Power	310w/m ²				430w/m ²			
Maximum Power	600w/m ²				800w/m ²			
Refresh Rate	1920Hz-3840Hz							
Input Voltage	AC100-240V/50-60Hz ±10%							
Operating Temperature	-20°C ~ 60°C							
Operating Humidity	10% ~ 90%RH							
Life Span	≥100000Hour							
Gray Scale	12-16Bit							49/50 PAGE


Application



Exhibition



Railway Station

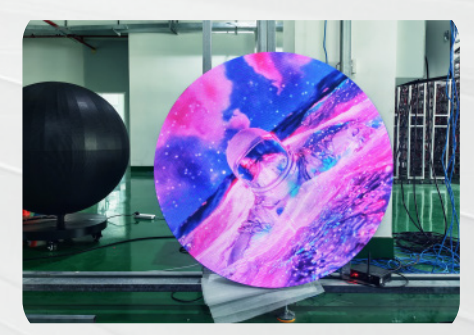

Airport Waiting Hall

CyliVision CV SERIES

Pixel Pitch : P1.8 / P2 / P2.5 / P3 / P4 / P5 / P6 / P8



Customizable



High Refresh Rate



Creative



Uniform Brightness



Customizable Design



Seamless Splicing

Key Features

- Distinctive Shape
- All-Round Display
- Supporting Both Front And Rear Maintenance
- Streamlined Appearance
- Convenient Maintenance

Specifications

Scene	Indoor					Outdoor		
Product Model	P1.8	P2.0	P2.5	P3	P4	P5	P6	P8
Pixel Pitch	1.86mm	2mm	2.5mm	3mm	4mm	5mm	6mm	8mm
LED Lamp	SMD1212	SMD1515	SMD2121	SMD2121	SMD2121	SMD1921	SMD1921	SMD2727
Brightness	> 600cd/m ²					> 5,000cd/m ²		
Average Power	310w/m ²					430w/m ²		
Maximum Power	600w/m ²					800w/m ²		
Refresh Rata	1920Hz-3840Hz							
Cylinder Size	Customized							
Input Voltage	AC100-240V/50-60Hz							
Life Span	≥100000Hour							
Operating Temperature	-20°C ~ 60°C							
Operating Humidity	10% ~ 90%RH							
Gray Scale	12-16Bite (bit)							

Application



Shopping Mall



Hotel



Science Museum

BrandHalo BH SERIES

Pixel Pitch : P1.86 / P2 / P2.5 / P3 / P4 / P5 / P6 / P8



Seamless
Stitching



Creative
Custom



Integrated
Display



Easy
Maintenance



Modular
Design



Simple
Installation

Key Features

- Easy to install
- Supports front and rear maintenance
- Multiple Installation Methods
- Higher reliability and stability
- High-Definition Picture Quality

Specifications

Scene	Indoor				Outdoor			
Product Model	P1.8	P2.0	P2.5	P3	P4	P5	P6	P8
Pixel Pitch	1.86mm	2mm	2.5mm	3mm	4mm	5mm	6mm	8mm
LED Lamp	SMD1212	SMD1515	SMD2121	SMD2121	SMD1921	SMD1921	SMD1921	SMD2727
Brightness	>600cd/m ²				>5000cd/m ²			
Average Power	310w/m ²				430w/m ²			
Maximum Power	600w/m ²				800w/m ²			
Refresh Rate	1920Hz-3840Hz							
Input Voltage	AC100-240V/50-60Hz							
Gray Scale	12-16Bit							
Life Span	≥100000Hour							
Operating Temperature	-20°C ~ 60°C							
Operating Humidity	10% ~ 90%RH							

Application



Brand Name




Advertisement




LOGO

SonicBeam SN SERIES

Pixel Pitch : P1.86 / P2 / P2.5 / P3 / P4 / P5 / P6 / P10

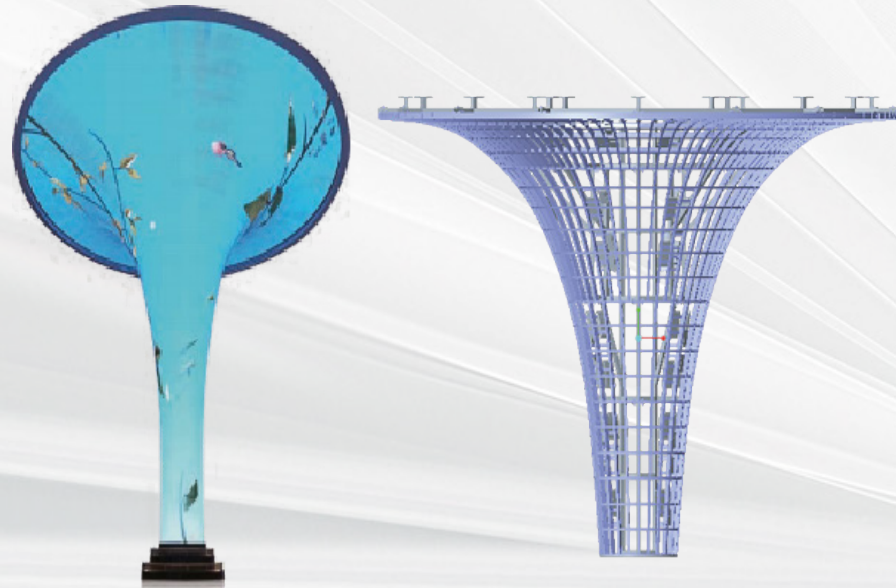

Seamless
Stitching



Creative
Customization



HD
Display



360°
Viewing Angle



Unique Shape



High
Contrast


Key Features

- Highly Ornamental
- High refresh rate
- Seamless Splicing Eliminates Visual Seams
- Excellent Flatness
- Magnetic Mounting Design

Specifications

Scene	Indoor					Outdoor		
Product Model	P1.8	P2.0	P2.5	P3	P4	P5	P6	P8
Pixel Pitch	1.86mm	2mm	2.5mm	3mm	4mm	5mm	6mm	8mm
LED Lamp	SMD1212	SMD1515	SMD2121	SMD2121	SMD2121	SMD1921	SMD1921	SMD2727
Brightness	≥600cd/m ²					≥5,000cd/m ²		
Average Power	310w/m ²					430w/m ²		
Maximum Power	600w/m ²					800w/m ²		
Refresh Rate	1920Hz-3840Hz							
Size	Customized							
Input Voltage	AC100-240V/50-60Hz							
Life Span	>100000Hour							
Operating Temperature	-20°C ~ 60°C							
Operating Humidity	10% ~ 90%RH							
Gray Scale	12-16Bit							


Application

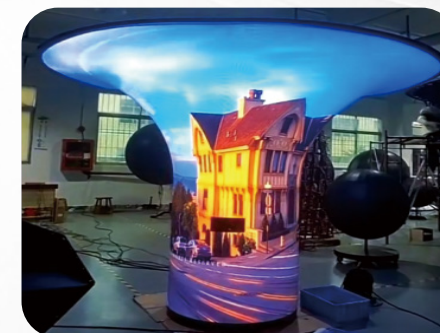

Exhibition Hall



Shopping Mall

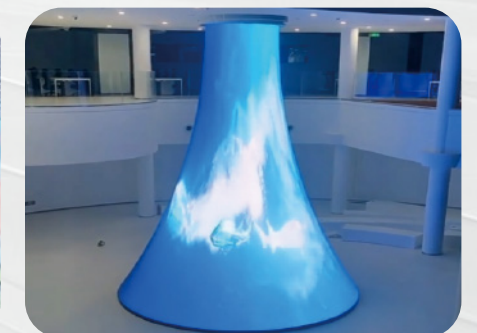

Museum

CosmoDome CD SERIES

Pixel Pitch : P1.86 / P2 / P2.5 / P3 / P4



Realistic 4D Feeling



Stable & Reliable



Snap evenly



Excellent Stereo Effect



Customizable Design



High Contrast


Key Features

- Excellent Heat Dissipation
- Convenient Maintenance
- Hollowed-Out Sound-Transmitting Design
- Long Service Life
- Unparalleled Realism

Specifications

Scene	Indoor				
Product Model	P1.8	P2.0	P2.5	P3	P4
Pixel Pitch	1.86mm	2mm	2.5mm	3mm	4mm
LED Lamp	SMD1212	SMD1515	SMD2121	SMD2121	SMD2121
Brightness	≥600cd/m ²				
Average Power	310w/m ²				
Maximum Power	600w/m ²				
Contrast	5000 : 1				
Refresh Rate	1920Hz-3840Hz				
Input Voltage	AC100-240V/50-60Hz				
Life Span	≥100000Hour				
Operating Temperature	-20°C ~ 60°C				
Operating Humidity	10% ~ 90%RH				
Gray Scale	12-16Bit				


Application

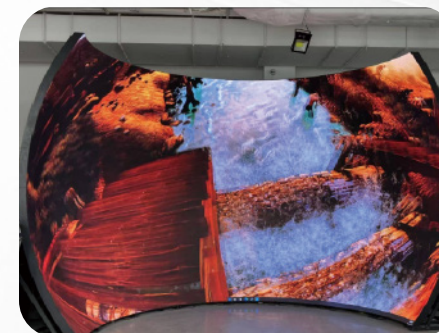

Museum



Children's Palace

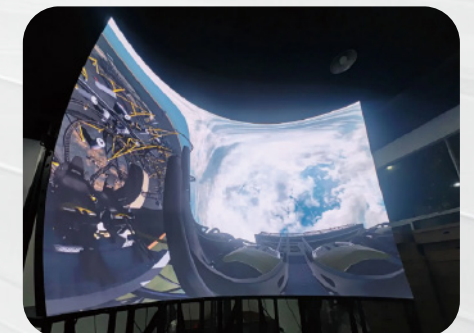

Planetarium

Triangular PX SERIES

Pixel Pitch : P2.5 / P3 / P4 / P5 / P6 / P8



Seamless
Stitching



Creative
Customization



Integrated
Display



Easy
Maintenance



Uniquely
Shaped



High
Refresh Rates

Key Features

- Quick Maintenance
- Modern Aesthetic
- Uniform Color Consistency
- Magnetic Mounting System
- Features Customizable

Specifications

Scene	Indoor			Outdoor		
Product Model	P2.5	P3	P4	P5	P6	P8
Pixel Pitch	2.5mm	3mm	4mm	5mm	6mm	8mm
LED Lamp	SMD2121	SMD2121	SMD2121	SMD1921	SMD1921	SMD2727
Brightness	≥600cd/m ²			≥5,000cd/m ²		
Average Power	310w/m ²			430w/m ²		
Maximum Power	600w/m ²			800w/m ²		
Refresh Rate	1920Hz-3840Hz					
Input Voltage	AC100-240V/50-60Hz					
Life Span	≥100000Hour					
Operating Temperature	-20°C ~ 60°C					
Operating Humidity	10% ~ 90%RH					
Gray Scale	12-16Bit					

Application



Hotel



Outdoor Stadium



Airport

CREATIVE PQM SERIES

Crystal Led Display

Cabinet Size : 540mm / 576mm / 720mm / 1000mm / 1200mm*240mm

Pixel Pitch : P3 / P4 / P5 / P6 / P7 / P8 / P10



Ultra Thin



Flexible



Transparent



Ultra Light



Cuttable



Customized

Key Features

- High Grayscale & High Image Quality
- High Brightness & High Contrast
- Ultra Thin & Ultra Light
- Easy Installation & Maintenance
- Flexible & Cuttable


Specifications

Product Name	P3(540x240)	P4(576x240)	P5(720x240)	P6(1000x240)	P7(1200x240)
Pixel Pitch	3.75*3.75mm	4*4mm	5*5mm	6.25*6mm	7.5*7.5mm
Transparency	80%	80%	85%	90%	90%
Cabinet Size	540*240mm	576*240mm	720*240mm	1000*240mm	1200*240mm
Cabinet Resolution	144*64	144*60	144*48	160*40	160*32
Brightness	1500cd/ m ²	1500cd/ m ²	1500cd/ m ²	1500cd/ m ²	1500cd/ m ²
Max. Power Consumption	≤180W/ m ²	≤180W/ m ²	≤150W/ m ²	≤150W/ m ²	≤150W/ m ²
Ave. Power Consumption	40~60W/ m ²	40~60W/ m ²	40~60W/ m ²	40~60W/ m ²	40~60W/ m ²
Module Weight	1Kg/PCS	0.6Kg/PCS	1Kg/PCS	1Kg/PCS	1Kg/PCS
Gray Scale	16 Bit				
Scan	1/ 64s	1/60s	1/48s	1/40s	1/32s
IP Rate	IP40				
View Angle	170°/170°				
Refresh rate	≥3840Hz				
Certification	CE,ROHS				

Application



Commercial Building

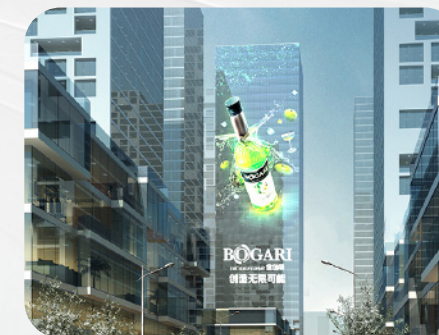

Advertising Board



Shopping Mall

04

RENTAL





RENTAL DSL&DQL SERIES

One-Click Module Installation And Removal

Cabinet Size : 500*500mm / 500*1000mm

Module Size : 250*250mm

Pixel Pitch : P1.95 / P2.6 / P2.97 / P3.91 / P4.81

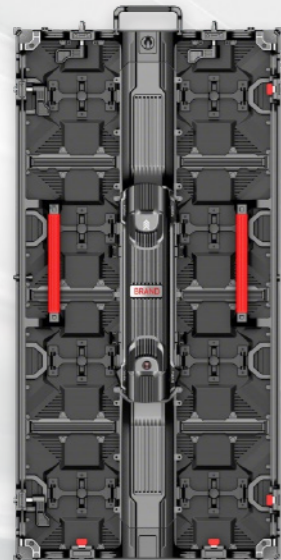

High Grayscale



High Refresh



Modular Design



Customized Solutions



IP65



Common Cathode

Key Features

- Light And Thin
- Corner Protector
- Support Curved Screen
- Never Black Screen
- Perfect Display Performance
- Front And Rear Maintenance

Specifications

Environment	Indoor				Outdoor			
Product Name	DQL-P1.95	DQL-P2.6	DQL-P2.97	DQL-P3.91	DSL-P2.6	DSL-P2.97	DSL-P3.91	DQL-P4.81
Pixel Pitch	1.95mm	2.604mm	2.97mm	3.91mm	2.604mm	2.97mm	3.91mm	4.81mm
LED Lamp	SMD1515	SMD2121	SMD2121	SMD1921	SMD1415	SMD1415	SMD1921	SMD1921
Module Size	250*250mm				250*250mm			
Cabinet Size	500*500*85mm				500*500*85mm			
	500*1000*85mm				500*1000*85mm			
Cabinet Resolution	256*256	192*192	168*168	128*128	192*192	168*168	128*128	104*104
	256x512	192x384	168x336	128x256	192x384	168x336	128x256	104x208
Cabinet Weight	7.6Kg-14Kg				7.6Kg-14Kg			
Cabinet Material	Die-cast Aluminium				Die-cast Aluminium			
IP Rate	IP30				IP65 (Front)			
Power Consumption Max.	540W/m ²				800W/m ²			
Power Consumption Ave.	260W/m ²				400W/m ²			
Brightness	≥600cd/m ²				≥4500cd/m ² (support 5000cd/m ² ,6000cd/m ² customized)			
Color Processor	12-16Bit				12-16Bit			
Visual Angle(H/V)	160°/140°				140°/120°			
Scan	1/32S	1/32S	1/28S	1/16S	1/24S	1/21S	1/16S	1/13S
Refreshing Ratio	≥3840Hz				≥3840Hz			
Maintenance Method	Front/Rear Maintenance				Front/Rear Maintenance			


Application



Virtual Production



Artistic Performance

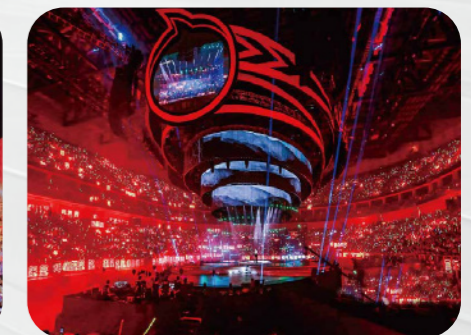

Concert



RENTAL DQC SERIES

Ultra-Liaht Pure Carbon Fiber Framework

Cabinet Size : 500*500mm / 500*1000mm / 1000*500mm / 1000*1000mm

Module Size : 500*250mm

Pixel Pitch : P3.9-7.8 / P5.9 / P7.8

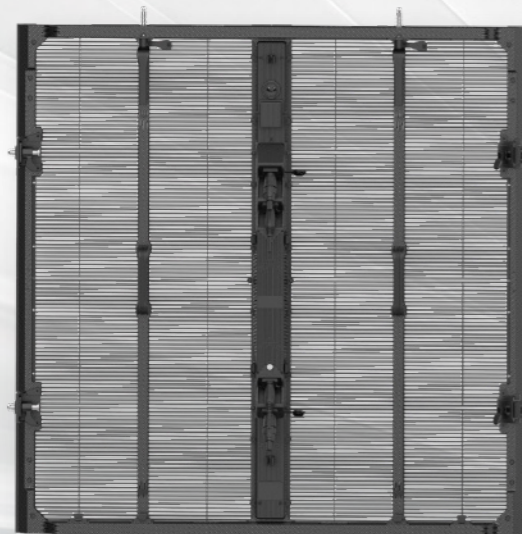

Carbon Fiber



Openwork Design




Wind-Resistant Frame



High Contrast



Quick Assembly



Slim & Transparent



IP65



GOB


Key Features

- Compact & Lightweight
- Slim, Transparent & Wind-Resistant
- Modular & Interchangeable
- Rapid Installation
- Quick-Assembly Transport Cart
- Easy Rear Maintenance


Specifications

Product Name	DQC-3.9-7.8	DQC-5.9	DQC-7.8
Pixel Pitch	X:3.9mm Y:7.8mm	5.9mm	7.8mm
LED Lamp	SMD1921		
Scan	1/8S	1/7S	1/8S
Refresh Rate	7680Hz		
Gray Scale	16Bit		
Brightness	Black State Luminance: ≤2000 nits White State Luminance: ≤4500 nits	Black State Luminance: ≤1600 nits White State Luminance: ≤4500 nits	Black State Luminance: ≤1500 nits White State Luminance: ≤4500 nits
Module Size	500*250mm		
Cabinet Size	1000*1000mm/1000*500mm/500*1000mm/500*500mm		
Cabinet Material	Carbon Fiber		
Cabinet Weight	10.5KG/6.3KG/6.9KG/4.6KG		
Viewing Angle	≥160		
Max Power Consumption	320W/m ²		
Operating Voltage (V)	AC100-240		
Max Floor-standing Hanging Installation Height (m)	20		
Protection Rating	IP65		

Application

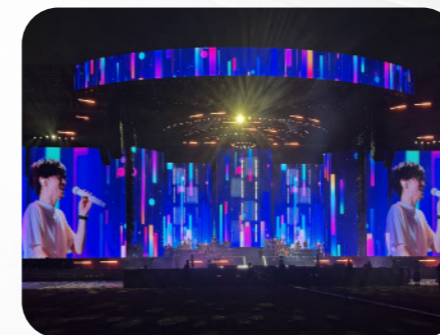

Live Show

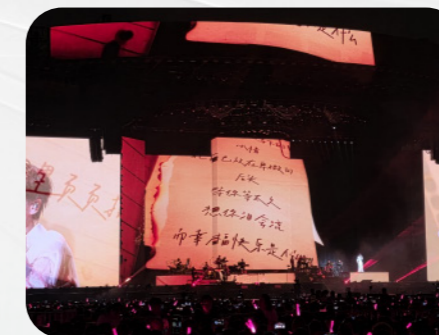

Concert



Performance

INDOOR CASE



P2.5 Spherical Screen Exhibition Hall




P2.5 Sharjah




P1.8 Immersive Exhibition Hall



P1.86 Dubai

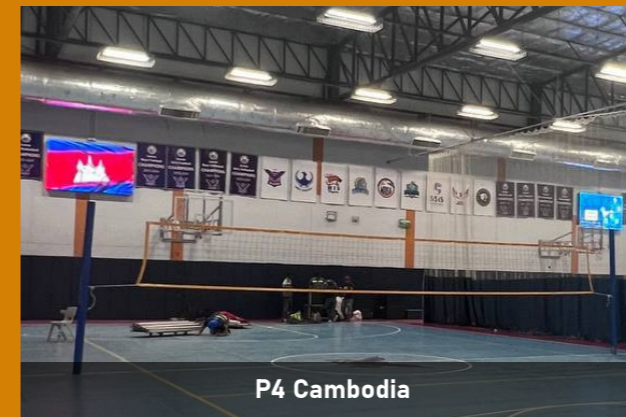

P4 Cambodia

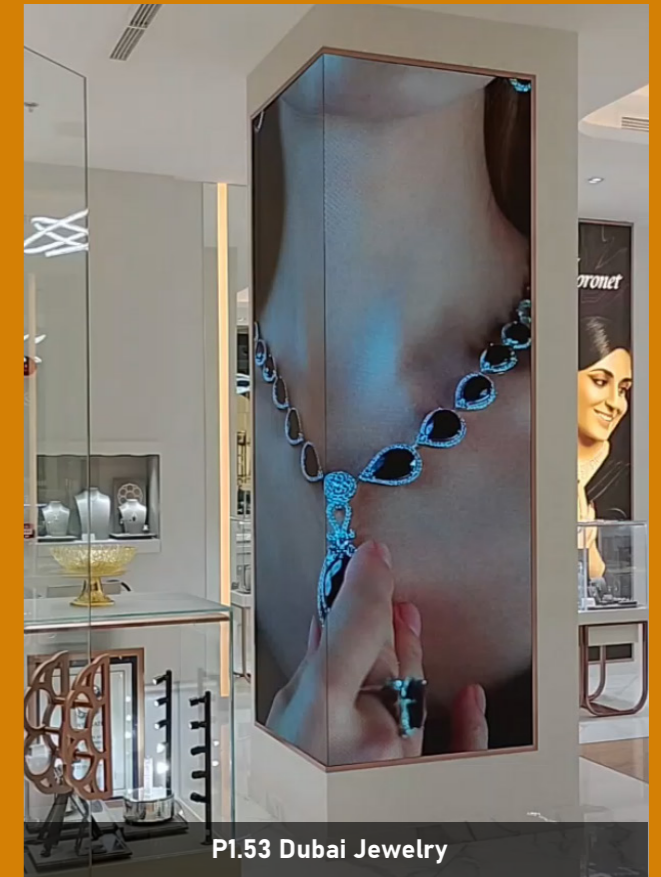

P1.53 Dubai Jewelry



P1.6 Exhibition Hall

OUTDOOR CASE



Jiangyin Gymnasium Aluminum Screen (280m²)




Gymnasium Aluminum Screen (120m²)




Outdoor advertising screen, Sharjah



Outdoor advertising screen, Shanxi (220m²)

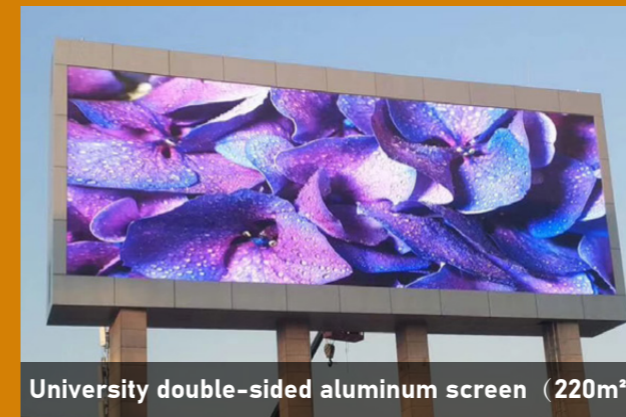

University double-sided aluminum screen (220m²)

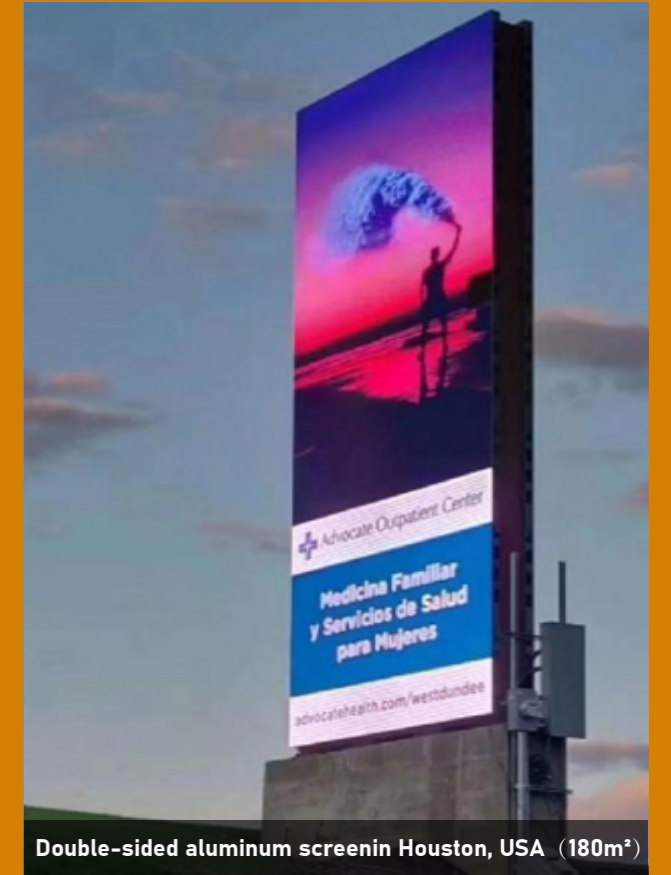


Double-sided aluminum screen in Houston, USA (180m²)



Outdoor advertising screen, Hunan (150m²)

CREATIVE CASE

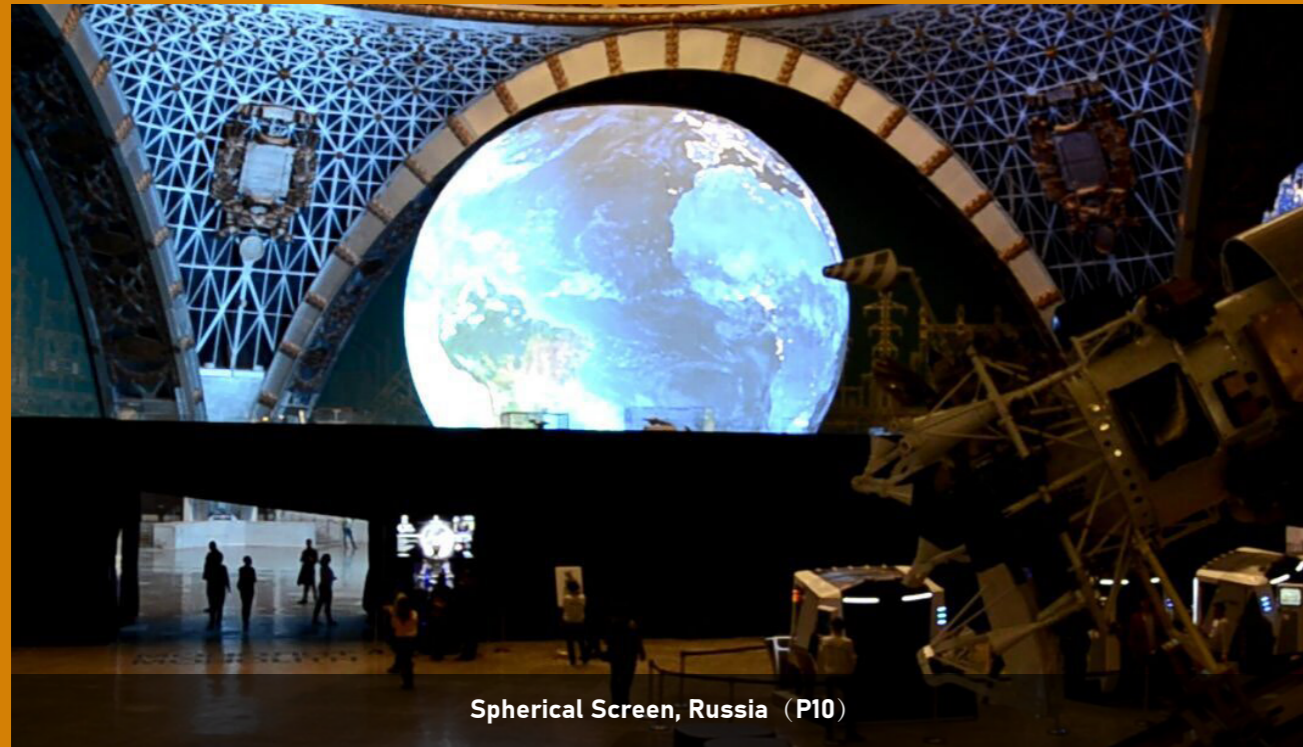

Spherical Screen, Russia (P10)



Spherical Screen, Zhejiang (P4)



Spherical Screen, UAS (P5)



LED Cans display, South Korea (P8)



Diamond LED Screen, Tianjing (P6)



Spherical Screen, Shandong (P4)




LED Cans display, Shandong (P3)

RENTAL CASE



Stage performance screen, Zhejiang (530m²)

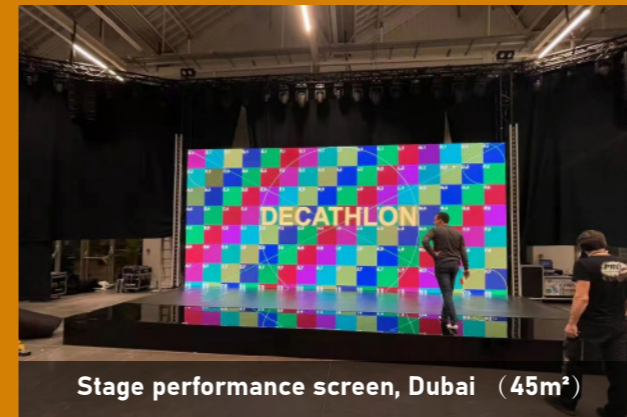

Stage performance screen, Dubai (45m²)



Stage performance screen, (240m²)



Stage performance screen, (80m²)



Stage performance screen, (80m²)



Stage performance screen, Shenzhen (80m²)



Stage performance screen, Wuhan (65m²)



Stage performance screen, (80m²)

SERVICE CONTENT



PRESALES

Conduct on-site inspections and evaluations to develop plans



IN SERVICE

Installation, testing, technical training



AFTER SALES

Product fault detection and technical consultation



SERVICE

The company provides 24-hour service, and after receiving feedback from users, we try our best to troubleshoot as soon as possible. When there is an engineering plan, our company will send technical personnel to guide the installation on site.



FOLLOW UP

Our company conducts regular follow-up visits to customers, inquiring about any problems encountered during use, analyzing and dissecting them, identifying the root cause, promptly troubleshooting, and resolving potential hazards. Finally, answer the questions raised by the operators.



TRAIN

Our company's on-site debugging personnel have the responsibility and obligation to provide unconditional training to users and system operators, and enable them to truly master the use and simple maintenance techniques.